

Explanatory Statement

Reef Credit method for accounting fine sediment abatement through improved grazing land management.

January 2025

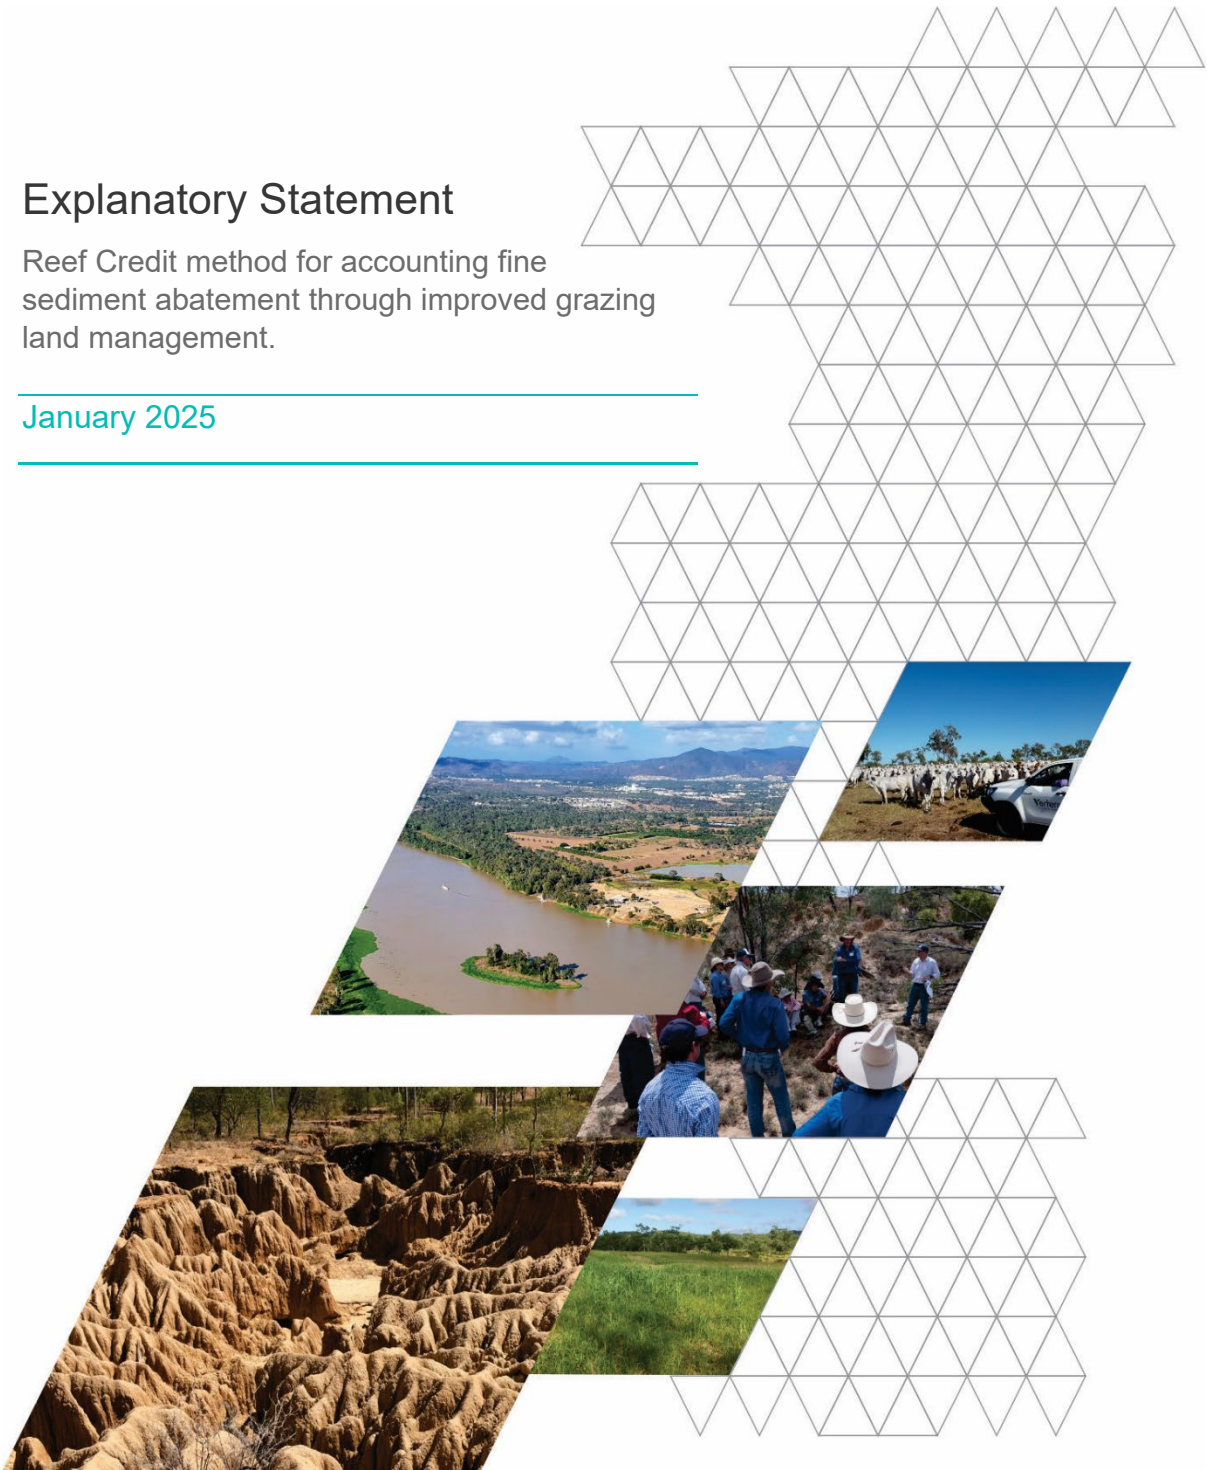


Table of contents

ISSUE STATEMENT 3

GLM METHOD OVERVIEW..... 3

 DYNAMIC REFERENCE COVER MODELLING 3

 REVISED UNIVERSAL SOIL LOSS EQUATION 3

EXPLANATORY STATEMENT: 4

 SECTION 1 – PROJECT DESCRIPTION 4

 SECTION 2 – PROJECT ELIGIBILITY 4

 SECTION 3 – PROJECT MAPPING AND DATA REQUIREMENTS 5

 SECTION 4 – REEF CREDIT PROJECT PLAN (GLM PLAN)..... 6

 SECTION 5 – PROJECT ACCOUNTING 6

Identifying Dynamic Reference Cover Pixels 6

Determine Monthly Project Baseline 7

Determine monitoring period adjusted groundcover 7

Determine RUSLE factors ‘R’ and ‘C’ 8

Sediment abatement calculations 9

Relevant Pools..... 9

Accounting for leakage 9

Accounting for disturbance events 9

 SECTION 6 – MONITORING AND RECORD KEEPING REQUIREMENTS 9

APPENDIX 1: PROJECT ACCOUNTING STEPS 10

Issue Statement

Sediment flowing to the Great Barrier Reef (GBR) affects the health of coral and seagrass habitats, reducing the ability of reefs to withstand or recover from events like coral bleaching (2022 Scientific Consensus Statement). The Reef 2050 Water Quality Improvement Plan includes sediment reduction targets for specific catchments. This Methodology, referred to as the Method (or GLM Method), aims to quantify the benefits of grazing improvement to help achieve the stated sediment reduction targets.

GLM Method Overview

The GLM Method will generate Reef Credits that incentivise landholders to achieve fine sediment abatement. Grazing land management improvements under the GLM Method aim to achieve a higher level of groundcover before high intensity rainfall periods, reducing the likelihood of hillslope fine sediment run-off and maximising the benefits to local waterways and the GBR.

The Method minimises the effects of external influences such as seasonality by applying Dynamic Reference Cover Modelling (DRCM). This ensures crediting only occurs for changes in grazing land management activities. Calculations under the GLM Method are based on a refined sediment delivery model applied by the Australian and Queensland Governments known as the Revised Universal Soil Loss Equation (RUSLE).

Dynamic Reference Cover Modelling

Dynamic Reference Cover Modelling (DRCM) is used to adjust ground cover changes for seasonal influences. Under this Method, minimally disturbed areas (pixels) termed 'reference areas' are used to benchmark changes in groundcover through time. These areas can be thought of as 'control' areas that are compared against areas where grazing land management changes have been implemented. The Method assumes changes in reference area ground cover is a result of weather and climate influences rather than grazing land management or other disturbances. Calculating the difference in ground cover between the reference and project areas is therefore a measure of grazing management impact on ground cover.

Revised Universal Soil Loss Equation

After the reference areas are identified through DRCM, the RUSLE (Figure 1) is applied to each project area pixel to calculate sediment runoff.


RUSLE factors required for the calculations under the GLM Method include:

- R – Rainfall, runoff erosivity
- K – Soil erodibility
- L – Slope length (topographic factor)
- S – Slope steepness (topographic factor)
- C – Cover management
- RF – Rock Factor
- P – Practice management

Note that Cover management is the only RUSLE factor that can be influenced through grazing land management within the GLM Method. Rainfall aside, the assumption is that all other factors remain

constant at the pixel level. The precision of the Method therefore relies on unbiased ground cover measurements that is achievable via remote sensing.

Figure 1: RUSLE Factors and data

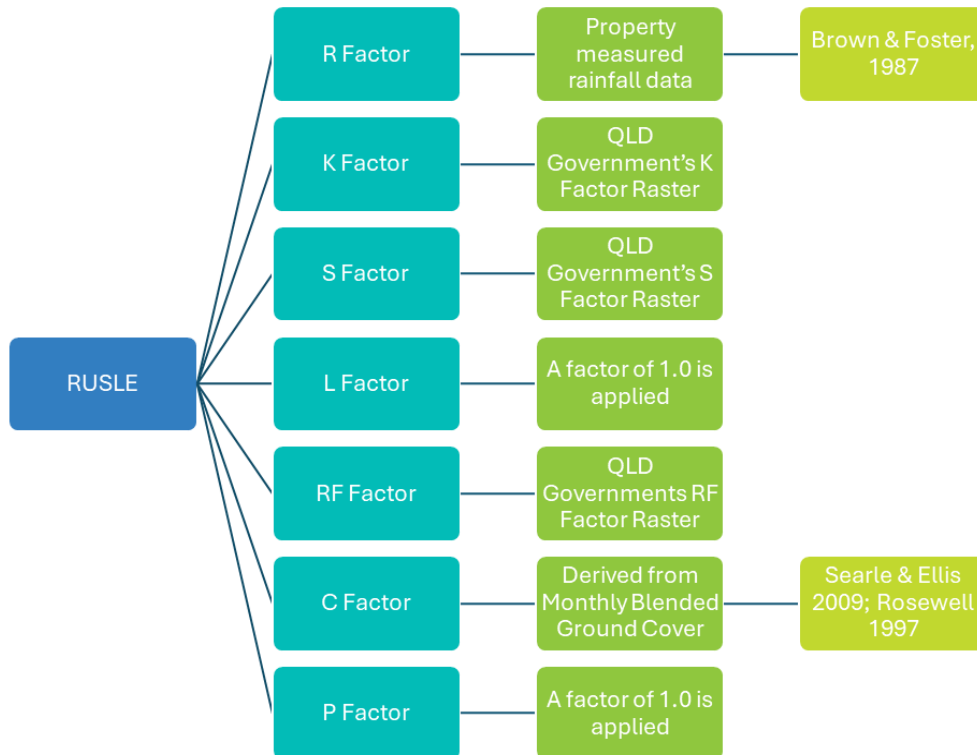

Explanatory Statement:

A statement for each section of the GLM Method is provided below.

Section 1 – Project Description

This section of the GLM Method details the summary information required to register a project. The GLM Method is structured to encourage whole of property, and/or enterprise-wide projects. This will incentivise landholders to think holistically and more easily manage the risk of leakage, i.e., moving cattle to non-project areas to maximise Reef Credit returns on registered project areas.

The distinction between the Project Area and the Reef Credit Accounting Zone(s) (RCAZ) is very important. The RCAZ is the explicit area where sediment abatement is calculated, while project activities occur across the whole Project Area.

Section 2 – Project Eligibility

Credits under the GLM Method can occur within GBR catchments where grazing is the principal land use. A 25-year crediting period ensures long-term benefits for the grazing enterprise and the environment.

Section 2 details project exclusions, including:

- **Irrigation** – The RUSLE requires a rainfall factor that might be confounded through irrigation. There are calculations that will cater for this but excluded from the GLM Method for simplicity.
- **Fertiliser application** – Fertiliser has potential negative impacts to the GBR if leeching occurs. Like irrigation, areas receiving fertiliser application are excluded.
- **Broadscale clearing** – Clearing has negative impacts on the GBR and an excluded activity for accounting purposes. There are conditions for cleared areas to be include in the RCAZ after 14 years from the date of clearing.

To participate, landholders will need to develop a Grazing Land Management (GLM) plan outlining their approach to improving grazing practice and reducing sediment run-off across the Project Area.

Further, to qualify for Reef Credits, a project must meet specific additionality requirements including those noted below. Additionally, Project proponents must use the Reef Credit Additionality Tool to demonstrate compliance:

- Reef Credits can only be generated from activities that exceed legal and regulatory obligations. For instance, if current regulations set a minimum ground cover of 50% for grazing in the Great Barrier Reef catchment areas, credits can only be earned for improvements beyond this threshold. Refer to Section 5, Equation 5 for further in the Method for details on incorporating regulated minimums into calculations.
- Project activities must be included on the positive list in the Reef Credit Standard or Method.
- Project activities must not be on the negative list in the Reef Credit Standard or Method.

Section 2 also includes a detailed description of leakage risk management. Two scenarios are identified for consideration:

- **Scenario 1:** Land beyond the Project Area (including other properties) within the operational control of the project participant/s of the same agricultural enterprise.
- **Scenario 2:** Land within the Project Area but not within the RCAZ, e.g., land not monitored by satellite ground cover mapping due to having > 60% woody vegetation.

Project proponents must complete the steps stated under section 2.6.1 of the GLM Method. This is required at the time of the project application and for each monitoring period to determine if there is a risk of leakage, and if so, implement the appropriate procedure to account for leakage.

Section 3 – Project Mapping and Data Requirements

Mapping is required to identify Project Areas and the RCAZs. There is no need to exclude infrastructure from Project Areas. However, project proponents are encouraged to map infrastructure as inputs into the GLM Plans.

Project proponents should consider identifying discontinuous land as separate RCAZs. This will help divide the Project Area by broad land units and ensure representative reference and project pixels are identified. The project calculations must be run separately for each RCAZ.

Rainfall intensity measurement

Rainfall needs to be measured within the project area using a calibrated tipping bucket rain gauge. This gauge must report data in 6-minute increments (i.e., successive periods of time with each period

being no longer than 6 minutes) and meet required accuracy standards, allowing it to capture the expected range of rainfall rates effectively.

Fine Sediment proportion

Project proponents must create a soil sampling plan that stratifies the RCAZ for FS proportion sampling. The minimum number of strata should correspond to the unique values found in the Soil Erodibility layer (K raster) that intersect with the RCAZ. For each identified stratum, the minimum number of surface (0 - 15 cm) soil collection points will be either three samples per stratum or one sample for every 200 hectares of that stratum, whichever is greater. Particle size analysis to determine the FS proportion (<20 µm) from bulked samples by strata must be conducted by a National Association of Testing Authorities (NATA) accredited laboratory.

Section 4 – Reef Credit Project Plan (GLM Plan)

GLM Plans should align with the aims of the grazing business enterprise. Plans need to cover the entire Project Area and include strategies that are expected to increase ground cover.

Plans must be kept for the duration of the crediting period and be reviewed, updated, and submitted at the end of each monitoring period with the application for Reef Credits.

Section 5 – Project Accounting

The GLM Method calculates the delta between sediment delivery from an adjusted baseline scenario and a project reporting period scenario. The adjustment masks seasonality influences (i.e., periods of prolonged wet/dry weather) and calculates the proportion of sediment saving achieved through grazing management improvement.

Sediment savings only occur when it rains, therefore Reef Credits under the GLM Method are only issued for actual sediment abatement achieved. The level of ground cover directly influences sediment delivery, with higher ground cover reducing run off and soil loss. For this reason (and to capture rainfall events at appropriate intervals), RUSLE calculations occur monthly for the baseline period and reporting period.

Project accounting is conducted in two parts:


- Baseline period cover analysis
- Reporting period sediment calculations

Project Accounting steps are provided in Appendix 1.

Identifying Dynamic Reference Cover Pixels

The GLM Methods uses DRCM to identify areas least impacted from grazing management activities and sets these as 'control' areas.

Figure 2: Identifying reference pixels (for each month)

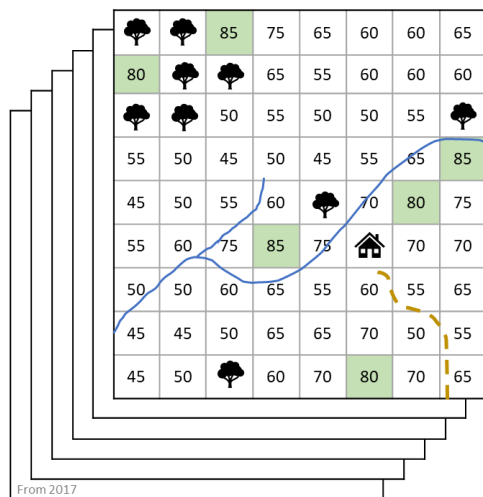

Steps:

- Download relevant data, apply 10km buffer on the Project Area.
- Identify the lowest groundcover percentage for every pixel using all data from 2017 to the present.
- Create a minimum cover layer from this data, then select all pixels within the highest 90-95 percentile range (the green pixels in this example).
- These are the reference pixels. All other pixels in the Project Area are referred to as project pixels.

Determine Monthly Project Baseline


It is necessary to establish a baseline of past ground cover and behaviour. Having defined the reference pixels, calculate the difference in ground cover between the average of the reference pixels and each Project Area pixel for each calendar month. This difference is the baseline for each pixel.

Determine monitoring period adjusted groundcover

During the project period, it is necessary to reset the DRCM pixels to include all capture dates between the project start and the end of the reporting period (repeat the process described in Figure 2). This limits any effects that changed practices or disturbances have on the average reference pixels by removing areas that may have recently come under pressure.

Using the updated reference and project pixels, determine the difference in ground cover from the reference pixels and each project pixel within the monitoring period. Then, compare these with the baseline expected difference and calculate the delta between the difference expected from the baseline and difference observed during the project period. Refer to Figure 3. The results are then used to adjust the actual captured monthly groundcover as a separate baseline input into the RUSLE calculations.

Figure 3: Project Accounting (Example)

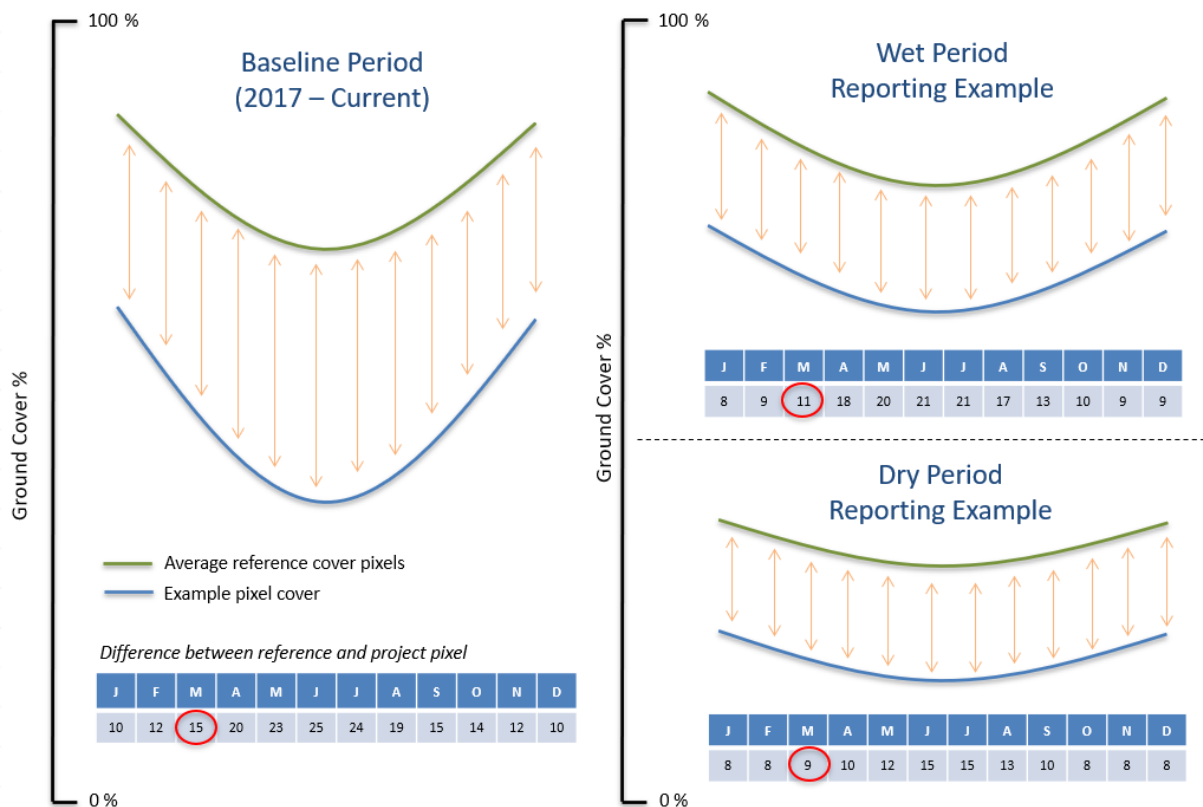

Notes on Figure 3 (March example):

- For the baseline period (left half of Figure 3), the difference between the average cover of reference pixels and an example project pixel is 15% (noting a difference is recorded for each project pixel, this is a single pixel example).
- During a wet reporting period (top right of Figure 3), the average ground cover increases for both the reference pixels and the example pixel. The difference between the two is now 11%, a 4% improvement from the baseline that was 15%.
- During a dry reporting period (bottom right of Figure 3), the average ground cover decreases for both the reference pixels and the example pixel. The difference between the two is now 9%, a 6% improvement from the baseline that was 15%.

Run RUSLE using the ground cover as measured and ground cover adjusted to the baseline. The difference can be credited to grazing management improvement.

Determine RUSLE factors ‘R’ and ‘C’

The only factors that require calculations before input into the RUSLE are monthly rainfall erosivity and cover factors. The GLM Method utilises the following:

- R - factor from measured rainfall data
- C - factor from ground cover

Sediment abatement calculations

With all the factors, including the C factor for the measured ground cover, and a C factor for the modelled ground cover, calculate two spatially explicit RUSLE layers (measured and modelled). The difference is the benefit and can be used for crediting.

Relevant Pools

While the Method will calculate total sediment loss and abatement, only fine silt and clay fractions (<20 µm) are subject to sediment reduction targets (referred to as fine sediment). Project proponents must identify and record the proportion of fine sediment in soils and multiple this by the total sediment. Further, a sediment delivery ratio assumes a proportion of fine sediment will never reach the GBR after mobilisation. Total fine sediment abatement also needs to be multiplied by this ratio.

Accounting for leakage

The concept of project leakage arises because actions taken in one location might lead to changes in behaviour or land use elsewhere, indirectly influencing the net sediment benefit. For example, if a GLM project succeeds in sediment abatement in a particular paddock, it might encourage the landowner to move cattle to a nearby paddock and increase grazing pressure, thereby offsetting the gains achieved by the original project.

Project leakage is an important consideration when evaluating the overall effectiveness of Reef Credit initiatives. To ensure project integrity and credibility, project developers must carefully assess and account for potential leakage effects in their calculations and implementation plans. By doing so, they can take measures to mitigate unintended consequences and ensure GLM projects genuinely contribute to sediment reduction efforts.

Accounting for disturbance events

Any natural and unmanageable disturbance, for example, fire originating from a neighbouring property, will impact ground cover and crediting. Project proponents may delay reporting on disturbed areas until site recovery has occurred or exclude affected areas from reporting for 12 months after any event. Evidence of disturbance events must be provided.

Section 6 – Monitoring and Record Keeping Requirements

This section sets out monitoring and record-keeping requirements under this GLM Method. Reporting may occur bi-annually, not exceeding 5 years.

A Monitoring Report must be submitted for each monitoring period. The project proponent must monitor the RCAZs and Project Areas for potential leakage and compliance with the Grazing Land Management plan. The monitoring report must include documentary evidence that confirms the stated GLM activities occurred during the monitoring period. The monitoring report must also include detail of all disturbance events. These may be excluded from the RCAZ for the monitoring period (up to 12 months).

Appendix 1: Project Accounting Steps

The following steps are provided to assist with meeting the conditions of the GLM Method.

Table 1: Project Accounting

Project Accounting Steps	Equation(s)
Collect data and undertake project mapping	
Download data: <ul style="list-style-type: none"> Section 3 of the GLM Method 	NA (Geo Tiff)
Map Project boundaries: <ul style="list-style-type: none"> Project Area – Whole of property or grazing enterprise Reef Credit Account Zone(s) Irrigation areas Disturbance history, i.e., fire and land clearing 	NA (Shape file)
Identify Baseline Dynamic Reference Cover Pixels	
Determine baseline monthly ground cover proportion (from 2017 to project registration): <ul style="list-style-type: none"> Derived from government supplied monthly blended ground cover as defined in Section 3.4 of the GLM Method. 	1
Identify reference and project pixels from 2017 to project registration date: <ul style="list-style-type: none"> Create a minimum ground cover layer for all months (equation 2). Select reference pixels from 10km Project Area buffer (equation 3). Assign all remaining pixels in the Project Area as project pixels (equation 4). 	2, 3, 4
Determine Monthly Project Baseline	
Using average reference and individual project pixels from the step above: <ul style="list-style-type: none"> Calculate the spatial difference in ground cover for each month over the baseline period, from 2017 (equation 5). Account for regulated minimum ground cover (equation 5). Calculate the average calendar monthly difference in ground cover between reference and project pixels for the baseline period (equation 6). 	5, 6
Identify monitoring period and adjust ground cover	
Identify reference and project pixels from 2017 to project reporting date: <ul style="list-style-type: none"> Create a minimum ground cover layer for all months (equation 2). Select reference pixels from 10km Project Area buffer (equation 3). Assign remaining areas within the RCAZ as project pixels (equation 4). Calculate the difference in ground cover between the reference and project pixels for the monitoring period (equation 7). 	2, 3, 4, 6, 7, 8, 9

Project Accounting Steps	Equation(s)
<ul style="list-style-type: none"> (Equation 8) - Calculate the difference of the difference. That is ground cover difference during monitoring period (equation 7), minus ground cover difference during baseline period (equation 6). Adjust monthly ground cover to respect the difference (equation 9). 	
RUSLE Modules 'R' and 'C'	
<p>R Factor - Monthly rainfall erosivity:</p> <ul style="list-style-type: none"> Using minimum 6-minute interval pluviograph data from the site monitoring station, calculate storm rainfall erosivity (equation 10). Calculate monthly R value (equation 11). 	10, 11
<p>C Factor:</p> <ul style="list-style-type: none"> Calculate monthly C value - measured (equation 12). Calculate monthly C value - adjusted for the baseline expected difference modelled (equation 13). Respecting regulated minimum ground cover. 	12, 13
Relevant Pools - Sediment abatement calculations	
<ul style="list-style-type: none"> Run monthly RUSLE for each month of the monitoring period using both the measured C value and the baseline modelled C value. Account for fine sediment proportion and the delivery ratio (equation 14). 	14
Accounting for leakage	
<ul style="list-style-type: none"> Account for leakage when considered 'likely' (equation 15). 	15
Reef Credit Calculation	
<ul style="list-style-type: none"> Apply the correction factor to convert the fine sediment abatement to an equivalent Reef Credit (equation 16). 	16